

**Ideal for welding thin metal sheets, it has been designed to fix cars at a minimum current of 15 A. The SMART interface facilitates settings, for considerable time saving.**

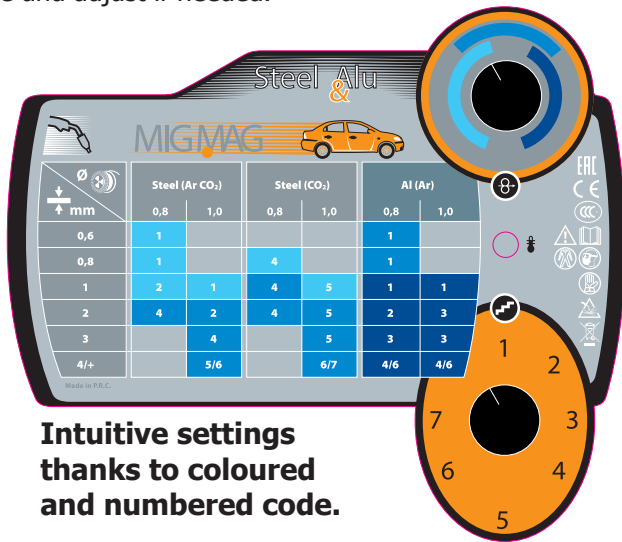
## Intuitive use

The CARMIG simplifies both wire speed and voltage settings.

Thanks to the SMART chart, find the right settings based on metal thickness and wire type.

Then, depending on the charts' recommendations, simply select :

- Voltage (7 positions knob )
- Wire speeder by setting the potentiometer on the indicated colour zone and adjust if needed.




**Intuitive settings thanks to coloured and numbered code.**















## Professional level specification

- Welding :
  - Steel / stainless / CuSi3 / CuAl8 wire from Ø 0.6 to 1.0 mm.
  - Alu wire (AlMg5) of Ø 0.8 mm.
- 400 V three phase power supply.
- EURO Torch 150 A - 3 m.
- Wire feeder motor 2 rollers of 40 W.
- Takes 5 and 15kg wire reels (200 and 300 m).
- Supports gas bottles up to 10 m<sup>3</sup>.
- Compatible with an electrical generator (5 kVA).
- Mobile thanks to its 4 wheels including 2 pivoting wheels.

Supplied with :  
- 1 torch 150 A - 3 m  
- 1 earth clamp 200 A - 3 m  
(regulator not included)

  
Support  
Gas bottle  
4 m<sup>3</sup> - 10 m<sup>3</sup>

											
50/60hz	10A	min▷max	Ømm	200	300	équipé d'origine / original equipment / originalausstattung / equipamiento de fabrica	EN60974-1 (40°C)	I <sub>A</sub> (60%)	X% (I <sub>2</sub> max)	cm/kg	Protected & compatible POWER GENERATOR (+/- 15%)
400V 3~	10A	15-200A	0.6 - 1.0	✓	✓	0.6 - 0.8	0.8	110A	150A 25%	47x77x79 / 50	5 kVA